




DRY GRAPHITE LUBRICANT

PRODUCT NUMBER: 5650

Is a dry film graphite lubricant that offers superior, long-lasting performance where petroleum products must be avoided. Graphite anti-seize dry coating resists dust and abrasive particles. Withstands water, oil, alkalies and most acids. Forms a strong bond to metal—will not wipe off easily. May be used at higher temperatures than molybdenum disulfide based dry film lubricants. Formula is more readily accepted by safety directors. May be used as a release agent.

APPLICATIONS

Excellent for use in foundries, machine shops, industrial plants, automotive manufacturers, steel mills, chemical plants, shipyards, oil fields, marine and mining operations and more. Apply to pipe threads, conveyors, motors, gaskets, vending machines, parking meters, chains and sprockets, pump assemblies, road equipment, rollers, wheels, hoists and more.

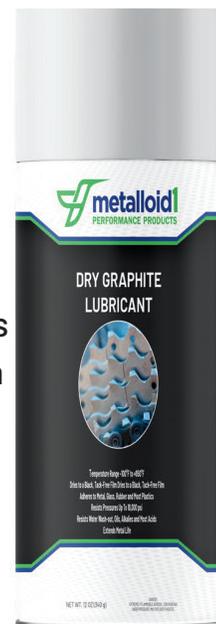

FEATURES & BENEFITS

- Temperature Range -100°F to +850°F
- Adheres to Metal, Glass, Rubber and Most Plastics
- Resists Water Wash-out, Oils, Alkalies and Most Acids
- Dries to a Black, Tack-Free Film
- Resists Pressures Up To 18,000 psi
- Extends Metal Life

SPECIFICATIONS

FORM: Black Liquid

FLAME EXTENSION: >18"

DETERGENCY: N/A

%VOC: >43%

STORAGE STABILITY: 1 year +

EVAPORATION RATE: Fast

FLASH POINT: N/A

COLOR: Black

SPECIFIC GRAVITY: .83

WETTING ABILITY: None

VISCOSITY: Thin

PHOSPHATES: N/A

ODOR: Solvent

SOLUBILITY IN WATER: Miscible

TOXICITY: 100 ppm OSHA PEL

pH: N/A

COLD STABILITY: 0°F

BIODEGRADABILITY: No

WWW.METALLOIDONE.COM

1160 WHITE STREET STURGIS, MI 49091